
DOUGLAS FIR

ENGINEERED CLEAR VERTICAL GRAIN

SOLID ENGINEERED 34" x 314" ECO-FRIENDLY PLANK

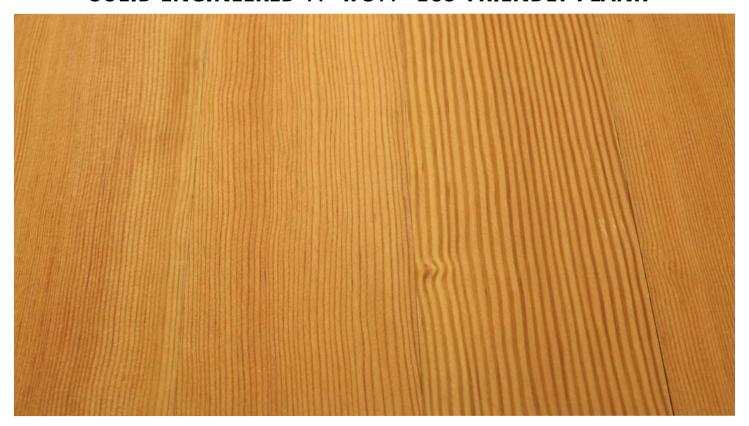

DOUGLAS FIR SOLID ENGINEERED flooring is offered in ¾" x 3-1/4" x RL plank. The wear layer is constructed of prime vertical grain Douglas Fir combined with a salvaged core and backer. This combination maximizes the usage of premium vertical grain fir and offers a cost savings for our customers.

Our Solid Engineered has a 3/16" sanded wear layer. By using prime vertical grain material for the wear layer, we can maximize product yields by developing three times the recovery. A balanced construction of prime vertical grain and salvaged material for the core and backer creates an



eco-friendly product offering a variety of applications including walls and ceilings. Unlike solid wood flooring, this specialty flooring can be optionally nailed, glued or floated.



CONTACT US

Phone: 1- 800-824-5671 Fax: 1- 503-635-6140

Email: sales@oregonlumber.com

FIND US ON:









FINISH OPTIONS

- Presanded Unfinished
- Prefinished Natural UV Oil
- Custom colored options available

ADVANTAGES OF ENGINEERED FLOORING

- Cost savings in material and labor
- Optional Prefinished with square edge
- Multiple application possibilities
- Engineered Vertical Grain increases dimensional stability and offers better resistance to seasonal changes and extremes
- Utilizes the natural resource



To request samples, please contact us by phone or email.

PRODUCT SPECIFICATIONS

Size: 3/4" x 3-1/4" wide x random lengths 3-10' +/-

Species: Douglas Fir

Applications: Light commercial, multi-family housing, single-family housing

Construction: 4-ply 3/4" thick with 5mm wear layer; tongue and groove,

end matched; square edge; pre-sanded;

Installation: Nailed, floated or glued

Finish: Unfinished / prefinished natural UV oil

Colors: Custom colors



CONTACT US

Phone: 1- 800-824-5671 Fax: 1- 503-635-6140

Email: sales@oregonlumber.com







